


CHARGING QH-900 HEADSET

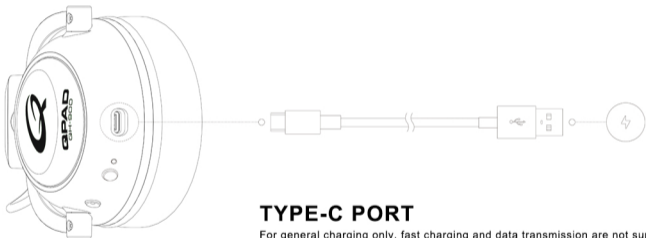

TYPE-C PORT

For general charging only, fast charging and data transmission are not supported.

Q logo LED in Red color when charging.

QPAD

POWER ON/OFF & 2.4GHZ CONNECTION



POWER ON

Press and hold the power button for 3 seconds to power on/off
QH-900 with Bluetooth and 2.4GHz at same time.

WIRELESS 2.4GHZ RE-PAIRING

Press and hold the power button for 6 seconds when headset is off.
(Q logo LED turn to flash green color.)

Q LOGO LED LIGHT ON/OFF

Press the power button one time during the headset is power on.

Q logo LED (Wireless 2.4Ghz Connection)	Connected – The LED (Q logo) is on with blue color.
	Re-Connecting – Green LED (Q Logo) is breathing slowly.
	Pairing – Green LED (Q Logo) flashes fast.
	The Q logo without lighting if your switch off the LED light.

*The 2.4Ghz connection will shut off when idle 10 mins. Please power off and on to reboot the connection.

QPAD

BLUETOOTH CONNECTION



BLUETOOTH PAIRING

Press the Bluetooth button for 6 seconds when the headset is on.

(Bluetooth LED light turn to continue quick flash.)

INCOMING CALL

Single press the Bluetooth button – Answering/End voice call.

MEDIA

Single press – Play/Pause Music.

Double press – Skip Track.

Triple press – Previous Track.

Bluetooth LED (Bluetooth Connection)	Connected – The indicator is on statically.
	Re-Connecting – The indicator breath slowly.
	Pairing – The indicator flashes fast.
	Bluetooth sleep mode – The indicator is off.

*The Bluetooth connection will go into sleep mode when not connecting any devices for 5 mins.
Please press the Bluetooth button for 6 seconds to re-pair the devices.

QPAD